

# FOLIANT TAURUS 530 NG

The **FOLIANT Taurus 530 NG** is a next generation of popular SF version. It is very compact and fast industrial laminating machine, constructed for non-stop work. It is equipped with a suction feeder, high speed bump separator and many options like non-sticky roller pallet stacker or Foiler. Due to its format and performance the machine is suitable for all jobs – all kinds of digital printed sheets lamination and high volumes of offset printed sheets size B2+ lamination too. **The machine maximum speed is up to 40 m/min.**, while performance is up to 3400 sheets per hour of B2 portrait (white paper 200 gsm). It means the performance is 14% higher than its SF predecessor.



## FEEDER

The FOLIANT Taurus 530 NG is equipped with a rising pile back separation stream feeder and with a suction feed head. It is driven by an Omron servo motor and controlled by a machine central PLC. The Becker vacuum pump is used for sheets back airing. The overlaps are electronically controlled, in an „in-run“ automatic mode, from the touch screen. The accuracy is +/- 2 mm under-lap (in a constant speed). The standard feeder is fitted with a lifting plate and its capacity is a 54 cm pile of paper.

## LAMINATOR

The FOLIANT Taurus 530 NG laminator maximum sheet size is 53 x 75 cm, extendable to 100 cm with optional XL module. The minimum sheet size is 30 x 25 cm (A4). The FOLIANT Taurus 530 NG machine is a single sided thermal industrial laminator, laminating the 115 – 600 gsm paper, with an unique „U“ cross bar for perfect lamination of thin sensitive sheets.

The laminating unit is equipped with an adjustable twin decurl unit:

- With a decurl blade for strong effect
- With a decurl roller for weaker effect and as protection for back print

The roll of a film is mounted on an air shaft that allows very convenient, easy and precise film positioning. The shaft capacity is up to 3000 m of the 24 - 31 microns film. The film holder unit is equipped with a trim slit and a perforating wheel.

The laminating process is made between two laminating rollers - a highly polished chrome roller, and a lower hard rubber pressure roller. The laminating roller is heated with a dry electric system inside the roller which consists of several rings mounted directly to inside wall of the roller. This ensures that heat transfer is perfect even at maximum speed. A sensitive temperature sensor is also inside the roller as close

to surface as possible. The warming up time is shorter than 10 minutes. The pressure is pneumatically adjustable, with an extra independent control knob for each roller edge.

The machine is fitted with OMRON PLC, which control all machines' functions. The used PLC system includes many automation items for an easy control of the machine and a reliable lamination. The whole machine is controlled by an interactive easy understandable icon touch screen panel – no language version is needed.

## SEPARATOR

The integrated bump separator (sheeter) is equipped with a pair of fast cycling rollers. The process is controlled from the machine PLC unit. The separated sheets are delivered into a vibrating jogger (optional) or a pallet stacker (optional).

## LAMINATING FILMS

The machine laminates the BOPP films (23 – 42 microns) and Nylon films (max. 35 microns). The PET films (max. 25 microns) can be laminated with the optional module only.

## OPTIONS

### JOGGER 530 (OPTIONAL)\*

It is an adjustable vibrating reception unit for the laminated sheets stocking. Its capacity is limited up to a 10 cm pile of sheets.

### PALLET STACKER - MANUAL (OPTIONAL)\*

It is a device equipped with a pallet trolley, pneumatically controlled from the machine PLC, which loads the laminated sheets into a high pile on pallet. Its capacity is 65 cm pile of sheets. Movement up is done manually.

### PALLET STACKER – INTEGRATED AUTOMATIC (OPTIONAL)\*

Fully automatic device that unloads laminated sheets into a high pile on pallet. Its capacity is 73 cm of paper.

### NON-STICKY PRESSURE ROLLER (OPTIONAL)

Standard rubber pressure roller is replaced by roller with non-sticky surface. Melted glue from film cannot stick to it even under heavy pressure. Cleaning of this roller is not necessary at all. Allows laminating sheets with windows.

### FOLIANT FOILER (OPTIONAL)

Winding device that allows use of metalized film (gold, silver, red, etc.) and spot varnish film over digital toner.

### XL MODULE (OPTIONAL)

Longer feeding table, extends maximum paper length up to 100 cm. Sheets with length over 75 cm cannot be unloaded to Integrated pallet stacker.

### PET FILMS LAMINATION MODULE (OPTIONAL)

It is a module integrated inside the separator for the PET films (max. 25 microns) processing.


### FILM LOADER/MANIPULATOR (OPTIONAL)

It is an electric lift with a film core adaptor for loading heavy rolls of film (max. capacity 125 kg). The device is not integrated with the machine. It is only connected with the machine's electric circuits.



Optional Jogger

Optional Pallet Stacker(manual)

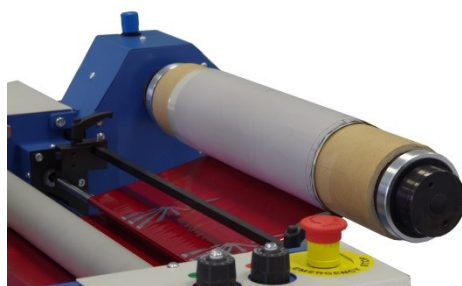

Optional Foliant Foiler

### Foliant Taurus 530 NG

<b>Max Speed</b>	40 m / min	<b>Warming up Time</b>	8 min
<b>Feeding</b>	Automatic	<b>Temperature Control</b>	80 - 140°C
<b>Feeding System</b>	Suction Feeding Head	<b>Power Supply</b>	3 ph., 400 V AC, 50-60 Hz
<b>Feeder's Load Capacity</b>	54 cm	<b>Power</b>	7000 W
<b>Overlaps</b>	Automatic, PLC Control	<b>Floor space (w x l)</b>	118 x 240 cm
<b>Overlaps Accuracy</b>	+ / - 2 mm	<b>Weight</b>	530 kg
<b>Separation</b>	Automatic, Bump Rollers	<b>Module for PET Films Processing</b>	Optional
<b>Paper Weight</b>	115 - 600 gsm	<b>XL Module (sheets up to 1 m)</b>	Optional
<b>Main Rollers Pressure</b>	Pneumatic	<b>Jogger 530</b>	Optional
<b>External Compressor</b>	150 l / min, 6 - 8 bar	<b>Pallet Stacker (manual)</b>	Optional, 65cm capacity
<b>Min. Sheets Size (w x l)</b>	30 x 25 cm	<b>Pallet Stacker (motorized)</b>	Optional, 73cm capacity
<b>Max. Sheets (w x l)</b>	53 x 75 cm	<b>Foliant Foiler</b>	Optional
<b>Max. Performance</b>	3400 B2 / hour	<b>Film Loader (Electric)</b>	Optional
<b>Film Micro Adjustable Air Shaft</b>	Standard	<b>Non-sticky pressure roller</b>	Optional