


FAR-4/42

Professional Line

High precision automatic punching machine

This automatic punching machine from Rilecart has been designed specifically for small and medium sizes. Reliability, a choice of several punching tools together with an intensive market research into customers production requirements allow the FAR-4/42 to achieve the best quality standards.

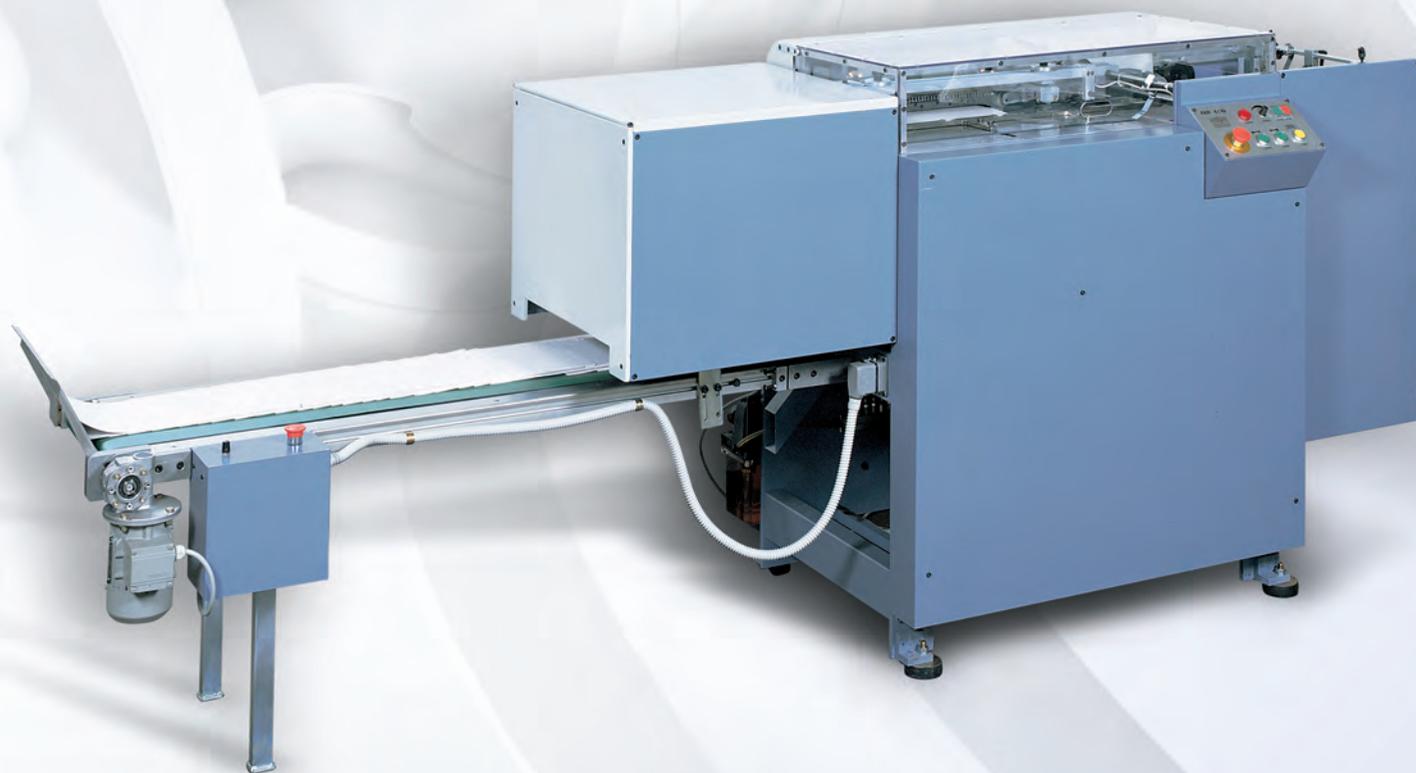

High precision automatic punching machine



The punching tool.



Sequence keeping device.




Picking device.



Paper feeding system.

PUNCHING PATTERN

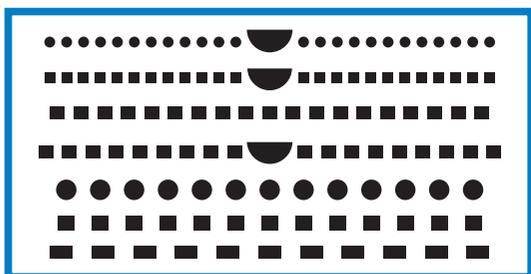

HOW IT WORKS

FAR-4/42 can be fed continuously with material of variable thickness (paper and/or light cardboard). Sheets are safely picked-up in bunches of 1,5/2 mm. each time, centred and punched with precision and accuracy. Sheets are then transported by a belt into the punching section. Punched bunches are kept in numerical sequence and collected on a separate conveyor, in shingle style, so that the following procedures are made easier.

FEATURES

- Maximum thickness per stroke: 2,5 mm. (standard 1,5 mm.)
- Maximum punching size: 400 x 300 mm.
- Minimum punching size: 110 x 90 mm.
- Speed: up to 150 strokes per minute.
- Punching distance from the edge: from 2 mm. up to 6 mm. depending on punching tools used.
- Operates continuously using a pre-loading device.
- Shingle style delivery table with adjustable speed.
- Several punching tools for double loop binding or other mechanical binding systems.

TECHNICAL SPECIFICATIONS

- ⚡ 240 V single phase 50/60 Hz; 3 Kw
- ↕ H 1200 x D 700 x L 3000 mm.
- ⚖ 1050 Kg

STANDARD PUNCHING TOOLS

- GF400/3: 400 mm., pitch 3:1", 48 pins 3,7 x 4,0 mm.
- GF400/3 5x4: 400 mm., pitch 3:1", 48 pins 5,0 x 4,0 mm.
- GF400/2: 400 mm., pitch 2:1", 32 pins 4,7 x 5,0 mm.
- GF400/2 6x6: 400 mm., pitch 2:1", 32 pins 6,0 x 6,0 mm.

Other punching tools are available on request.

The Company reserves itself the right to modify the features of the products shown in this catalogue.



RILECART® S.r.l.
WIREBIND INTERNATIONAL



RILECART - WIREBIND INTERNATIONAL
Headquarters and Factory:
Via Daniele Pesenti, n°1
24022 Alzano Lombardo - Bergamo
Tel. +39 035 515.900 - Fax +39 035 515.060
E-mail: info@rilecart.com - Internet: www.rilecart.com

